

PRODUCT DATA SHEET

NEMA MW 80

Class 155 - Copper and Aluminum - Round Conductors - Polyurethane/Polyamide coated magnet wire / winding wire.

APPLICATION

SODERON® 155 magnet wire / winding wire is an excellent choice for fine wire applications requiring a Class 155 insulation with soldering capabilities. The product's unique solder stripping properties along with the addition of the nylon topcoat enables SODERON® 155 to be an ideal choice for most winding applications and requirements. The film lends itself to the precise process control required in manufacturing many electrical / electronic devices.

As with all solderable magnet wire, care must be exercised in the application of SODERON® 155 magnet wire / winding wire since this material does not exhibit overload resistance properties like most non-solderable Classes 105, 130 and 155.

SODERON® 155 is recommended but not limited to the following applications:

- Appliance motors
- Automotive coils
- Bobbin wound and paper section coils
- Molded and encapsulated coils
- Relays
- Small motors, armature and fields
- Solenoids
- Timers and clock coils
- Toroidal coils

ENGINEERING HIGHLIGHTS

1. THERMAL CLASSIFICATION

SODERON® 155 magnet wire is a UL Listed Class 155 material when measured in accordance with the ASTM D2307 test method.

2. THERMOPLASTIC FLOW

Thermoplastic flow (cut-thru) temperature of SODERON® 155 magnet wire is in the 237°C range; well above maximum process conditions found in molded coil work, trickle impregnation processes and standard preheat varnish cycles specified for normal Class 155 systems.

3. SOLDERABILITY

SODERON® 155 magnet wire has excellent soldering properties without the excessive buildup of enamel residue associated with other solderable type resin coatings.

4. WINDABILITY

Flexibility and adhesion properties of the SODERON® 155 magnet wire film, because of its tough nylon topcoat, exceeds most winding applications and requirements.

5. ELECTRICAL

SODERON® 155 magnet wire insulation exhibits high dielectric strength.

6. CHEMICAL

The solvent resistant properties of SODERON® 155 are suitable for most classes 105, 130 and 155 varnishes, encapsulants, and treating resins.

7. NORMAL AVAILABILITY

- Round Copper Sizes:
28-47 AWG, Single Build
28-47 AWG, Heavy Build
- Round Aluminum Sizes
35 AWG & Heavier

Please consult Magnet Wire Marketing for additional size (including metric) and build information.

PRODUCT DATA SHEET

Performance data is representative of 36 AWG single build copper. **

THERMAL PROPERTIES

HEAT SHOCK RESISTANCE

TYPICAL PERFORMANCE: 20%, 1XD @ 175°C, no cracks
REQUIRED PERFORMANCE: 20%, 3XD, no cracks†

SOLDERABILITY

TYPICAL PERFORMANCE: 2.5 seconds @ 390°C
REQUIRED PERFORMANCE: ≤ 3 seconds @ 390°C†

THERMAL STABILITY

TYPICAL PERFORMANCE: 167°C
REQUIRED PERFORMANCE: 155°C minimum†

THERMOPLASTIC FLOW

TYPICAL PERFORMANCE: 237°C
REQUIRED PERFORMANCE: 200°C†

PHYSICAL PROPERTIES

ABRASION RESISTANCE: UNIDIRECTIONAL

TYPICAL PERFORMANCE: N/A
REQUIRED PERFORMANCE: N/A

ABRASION RESISTANCE: REPEATED SCRAPE

TYPICAL PERFORMANCE: N/A
REQUIRED PERFORMANCE: N/A

ADHESION AND FLEXIBILITY

TYPICAL PERFORMANCE: No topcoat or basecoat cracks
REQUIRED PERFORMANCE: 20%, 3XD, no cracks†

CONDUCTOR ELONGATION

TYPICAL PERFORMANCE: 26%
REQUIRED PERFORMANCE: 20% minimum†

SPRINGBACK

TYPICAL PERFORMANCE: N/A
REQUIRED PERFORMANCE: N/A

ELECTRICAL PROPERTIES

CONTINUITY

TYPICAL PERFORMANCE: ≤ 0 faults/100 feet @ 350V DC
REQUIRED PERFORMANCE: ≤ 15 faults/100 feet @ 350V DC†

DIELECTRIC BREAKDOWN VOLTAGE

RATED TEMPERATURE

TYPICAL PERFORMANCE: 2,696 volts, avg.
REQUIRED PERFORMANCE: 915 volts, minimum†


ROOM TEMPERATURE

TYPICAL PERFORMANCE: 3,780 volts, avg.
REQUIRED PERFORMANCE: 1,220 volts, minimum†

** The values shown represent typical average results and are not intended to be used as design data or specification limits.

† Requirements of NEMA MW 1000; Section MW 80-C.

All Sales are subject to Essex Furukawa Standard Terms and Conditions as posted on essexfurukawa.com. Copies available upon request.

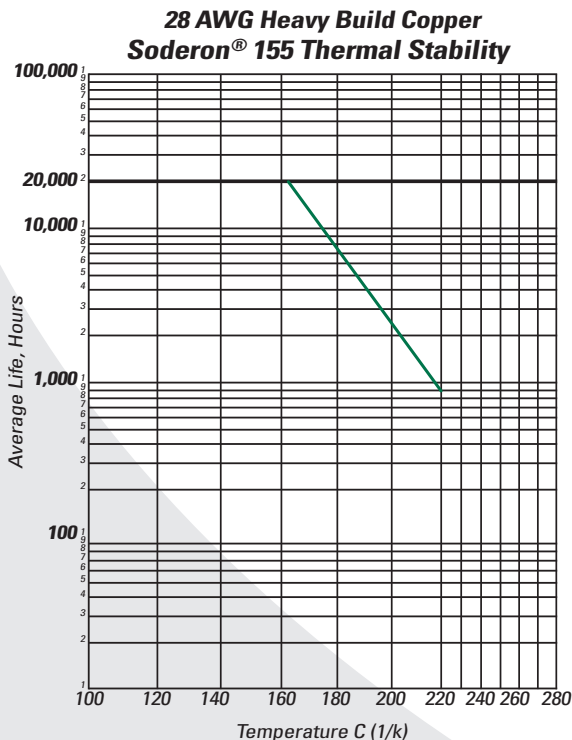

Essex Furukawa
 1601 Wall Street
 Fort Wayne, IN 46802
 260.461.4000
 © 2020 Essex Furukawa